



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2023.8.26	ZHANG	JIN

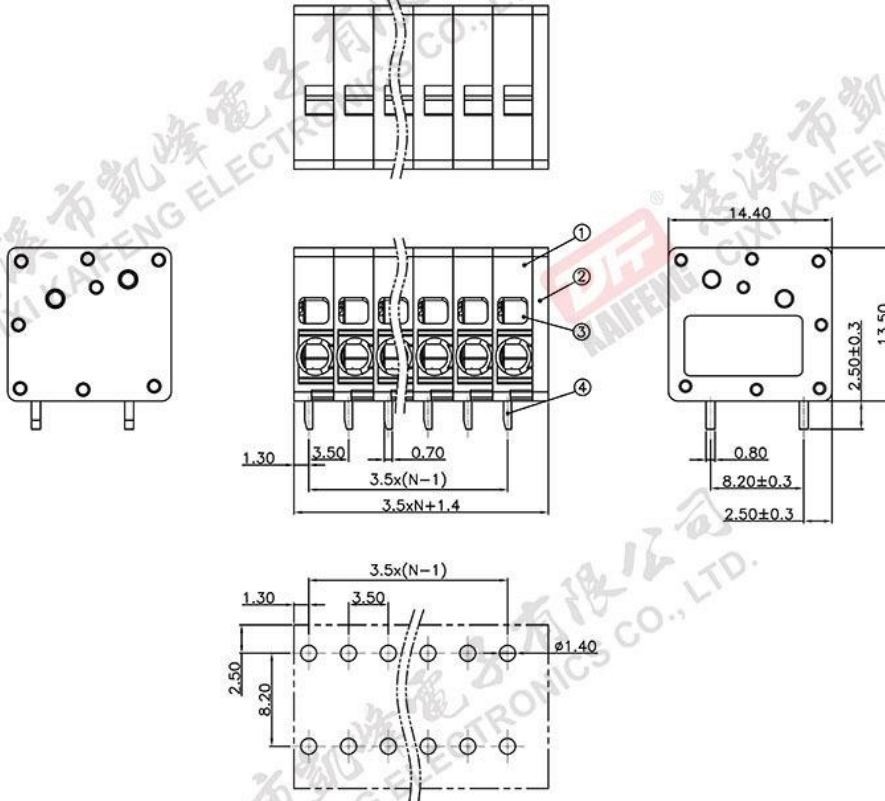

- Material
 - ◊Housing : PA66, UL94V-0
 - ◊Cover : PA66, UL94V-0
 - ◊Reed : Stainless steel
 - ◊Pin header :Copper alloy, Tin plated
- Electrical
 - UL IEC
 - Rated voltage : 300V 200V
 - Rated current : 10A 17.5A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC1600V/1min
 - Wire range : 24-16AWG;0.2-1.5mm²
- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Strip length: 10mm
- Conform to REACH and RoHS

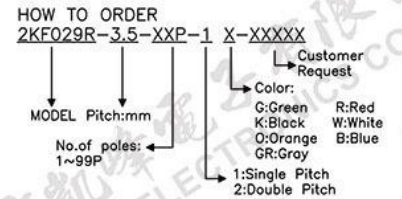

P.C.B.LAYOUT

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>6	0.1/10	mm	2KF029R-3.5-XXP-1X
~6	~10		A4	SERIES 2KF029
~10	~24			
~24	~30			
~30	~60			
~60	~100			
~100	~150			
>150	>150			
±0.15	±0.20			
±0.20	±0.30			
±0.30	±0.30			
±0.50	±0.50			
±0.70	±1.00			
±1.00	±1.30			
	±2°			
DRAWING TYPE		CUSTOMER DRAWING		
SCALE		1:1 SHEET 1/1		
DRAWING NO.		W11001112		

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD