
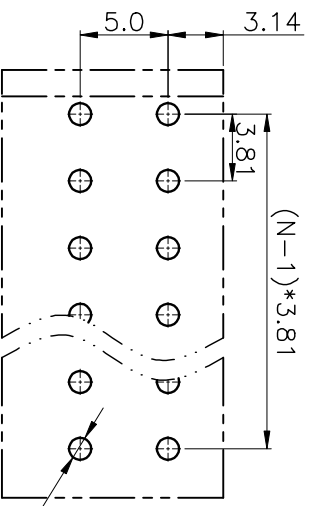
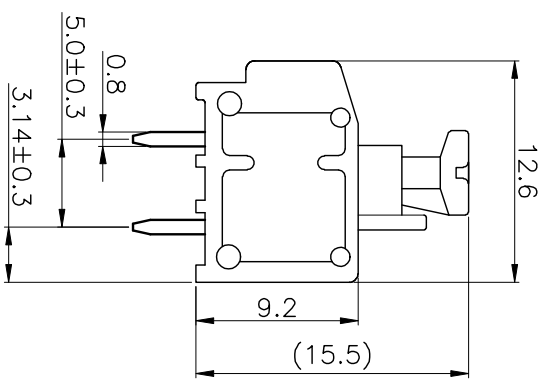
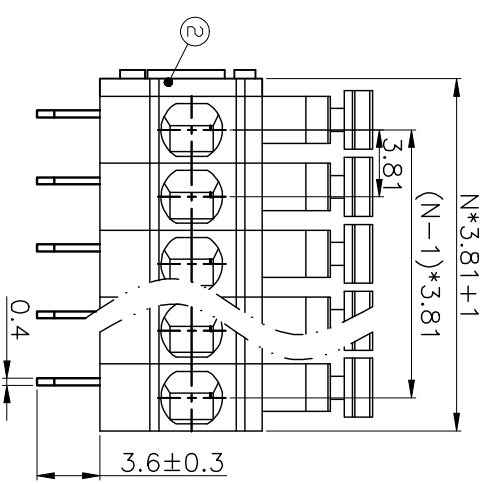
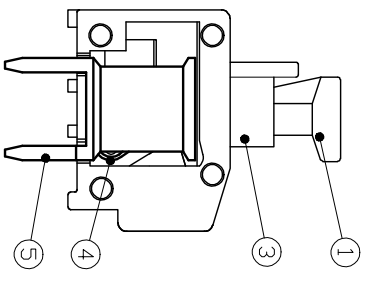


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.27	DENG	JIN

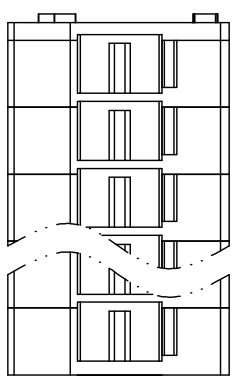

P.C.B.LAYOUT

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
~>6	>10	0.1/10
~>10	>24	0.1/10
~>24	>30	0.1/10
~>30	>60	0.1/10
~>60	>100	0.1/10
~>100	>150	0.1/10
~>150	>300	0.1/10
±2'	±2'	±2'

DRAWING TYPE	CUSTOMER	DRAWING
SCALE	1:1	SHEET 1 OF 1
DRAWING NO.	W110002332	


- Material
 - ⊙Button : PA66, UL94V-0
 - ⊙Cover : PA66, UL94V-0
 - ⊙Housing : PA66, UL94V-0
 - ⊙Reed : Stainless steel
 - ⊙Pin header : Copper alloy, Tin plated

- Electrical

UL	IEC
Rated voltage : 300V	250V
Rated current : 5A	10A
Contact resistance : 20mΩ(Max)	
Insulation resistance: 500MΩ/DC500V	
Withstanding Voltage : AC2000V/1min	
Wire range: 20-18AWG 1.5mm ²	

- Mechanical
 - Operating temperature: -40°C to +105°C
 - Soldering temperature: 250°C ±5 / 5sec
 - Strip length: 8-9mm

• RoHS compliance

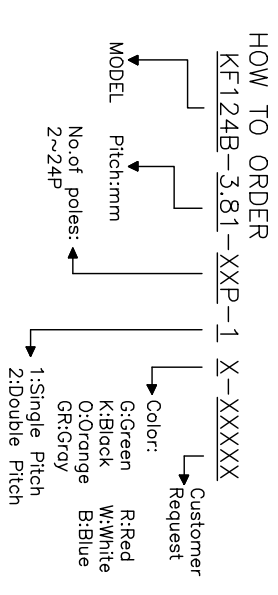

PROJECTION	TITLE
UNIT: mm	KF124B-3.81-XXP-1X
SHEET SIZE: A4	SERIES: KF124

DF 慈溪市凯峰电子有限公司
 CXI KAIFENG ELECTRONICS CO.,LTD