



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.20	ZHANG	JIN

- Material
 ØHousing : PA66, UL94V-0
 Pin header : Copper alloy, Ag plated
- Electrical
 UL IEC
 Rated voltage : 300V 320V
 Rated current : 15A 20A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC2000V/1min

- Mechanical
 Operating temperature: -40°C ~ +105°C
 Soldering temperature: 250°C ±5/5sec
- RoHS compliance

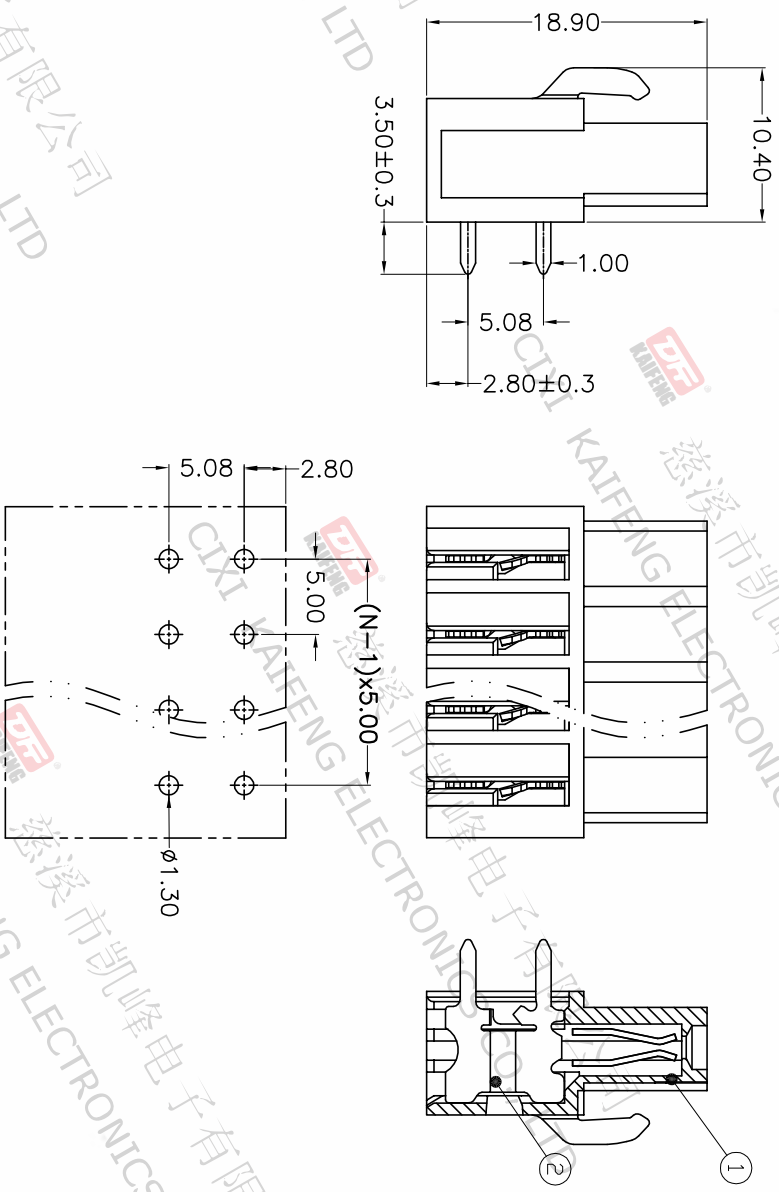

P.C.B.LAYOUT

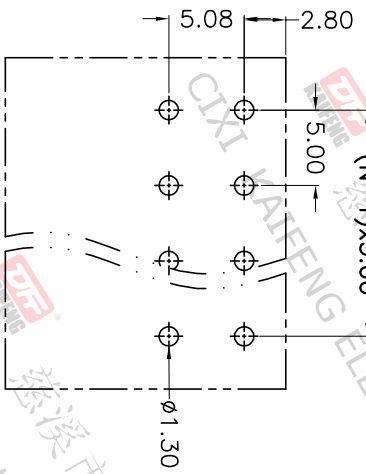

Pitch range	Nominal dimension range	□	▢
>0	>0	0.1/10	□
~6	~30	~	▢
~10	~60	~	▢
~24	~100	~	▢
~30	~150	~	▢
±0.15	±0.30	±0.50	±1.00
±0.20	±0.30	±0.50	±1.30
			±2°

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
DRAWING NO.	W10001892
SHEET	1 OF 1

PROJECTION	UNIT	TITLE
UNIT	mm	KF2EFR-5.0-XXP-1X
SHEET SIZE	A4	
SERIES	KF2EFR	

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

HOW TO ORDER
 KF2EFR-5.0-XXP-1 X-XXXXX

