



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.20	ZHANG	JIN

- Material
 ØHousing : PA66, UL94V-0
 ØPin header : Copper alloy, Ag plated
- Electrical
 UL IEC
 Rated voltage : 300V 320V
 Rated current : 15A 20A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC2000V/1min

- Mechanical
 Operating temperature: -40°C ~ +105°C
 Soldering temperature: 250°C ±5/5sec
- RoHS compliance

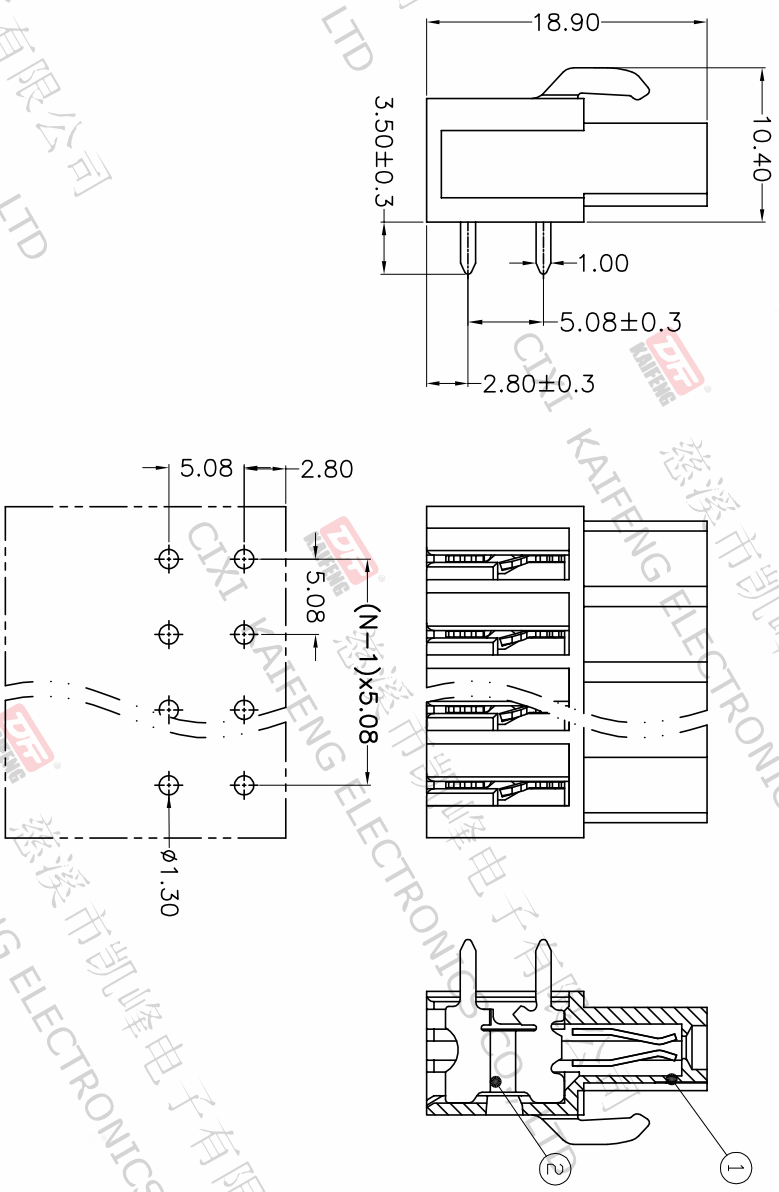

P.C.B.LAYOUT

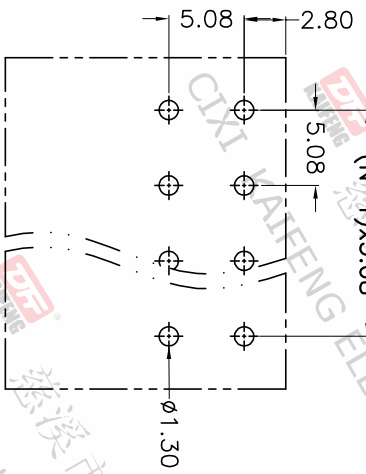

Pitch range	Nominal dimension range	PROJECTION
>0	>30	0.1/10
>6	>60	0.1/10
>10	>100	0.1/10
~6	~100	0.1/10
~10	~150	0.1/10
~24	~150	0.1/10
±0.15	±0.30	±2°
±0.20	±0.30	±2°
±0.30	±0.50	±2°
±0.70	±1.00	±2°
±1.30	±1.30	±2°

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W10001852

PROJECTION	TITLE
UNIT	KF2EFR-5.08-XXP-1X
SHEET SIZE	mm
SERIES	A4
	KF2EFR

DFE 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

HOW TO ORDER
 KF2EFR-5.08-XXP-1 X-XXXXX
 MODEL Pitch:mm
 No.of poles: 2~24P
 Color: Customer Request
 G:Green R:Red
 K:Black W:White
 O:Orange B:Blue
 GR:Gray
 1:Single Pitch
 2:Double Pitch