

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.29	DENG	JIN





- Material
 ØScrews : M2.5 steel, Zinc plated
 ØClamp : Brass, Ni plated
 ØReed : Stainless steel
 ØHousing : PA66, UL94V-2

- Electrical
 UL IEC
 Rated voltage : 300V 400V
 Rated current : 15A 24A
 Wire range : 20-14AWG 1.0-2.5mm²
 Withstanding Voltage : AC1600V/1min

- Mechanical
 Operating temperature: -40°C ~ +110°C
 Soldering temperature: 250°C ±5 / 5sec
 Torque: 0.4N.m (3.54Lb.in)
 Strip length: 6~7mm

- RoHS compliance

HOW TO ORDER
 KF8HWP-8.0-XXP-1 X-XXXXXX

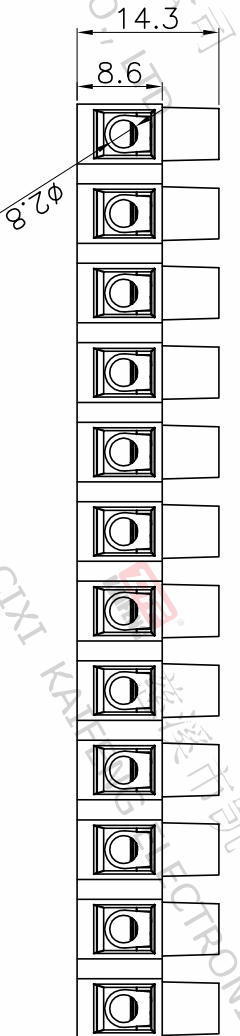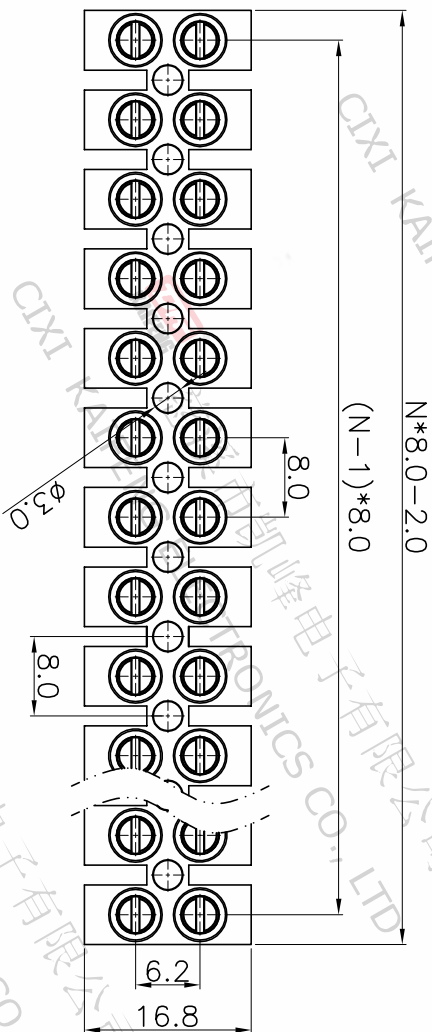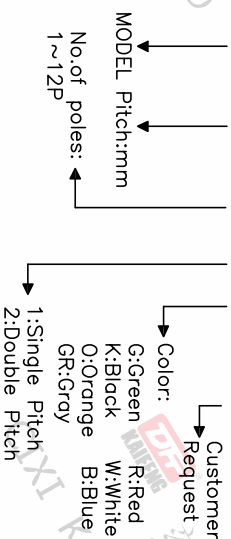

Pitch range	Nominal dimension range	PROJECTION	TITLE
>0	>6	0.1/10	KF8HWP-8.0-XXP-1X
~6	~10	□	
6	10	UNIT	mm
~24	~30	SHEET SIZE	A4
±0.15	±0.20	SERIES	KF8HWP
±0.30	±0.30		
±0.50	±0.50		
±0.70	±1.00		
±1.00	±1.30		
	±2°		

DRAWING TYPE	CUSTOMER DRAWING	DRAWING NO.
SCALE	1:1	W18000032
	SHEET	
	1 OF 1	

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD